

MV-IDA-PE-HDB15-RJ45DB9Open-ST

DB15M 接口网口组合线（标准）

DB15M 接口网口组合线（标准）可用于相机供电、输入和输出信号以及数据传输。




订货型号


- 3.5 米：MV-IDA-PE-HDB15-RJ45DB9Open-ST-3.5m
- 5 米：MV-IDA-PE-HDB15-RJ45DB9Open-ST-5m
- 15 米：MV-IDA-PE-HDB15-RJ45DB9Open-ST-15m

外形尺寸


3.5 米：

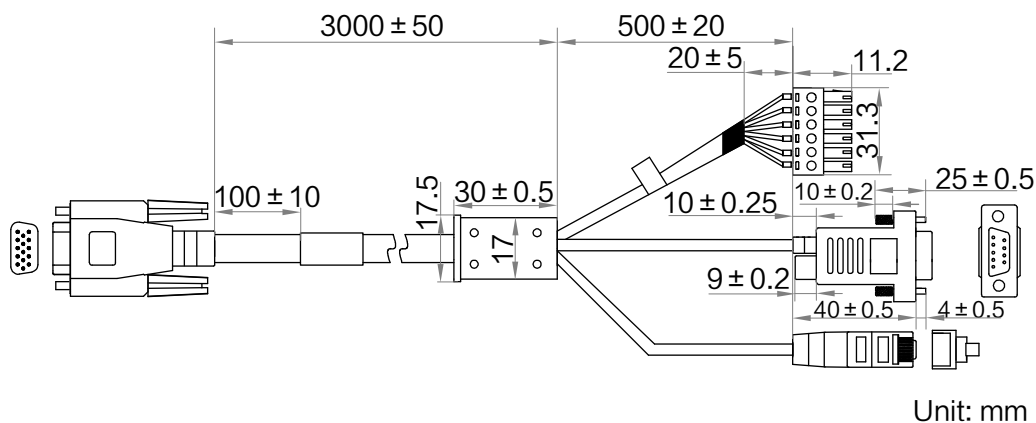

5 米:

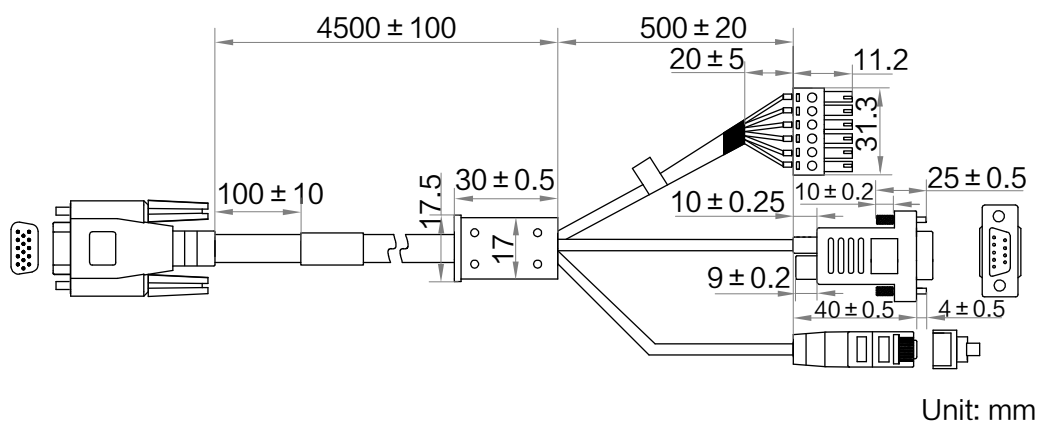

15 米:

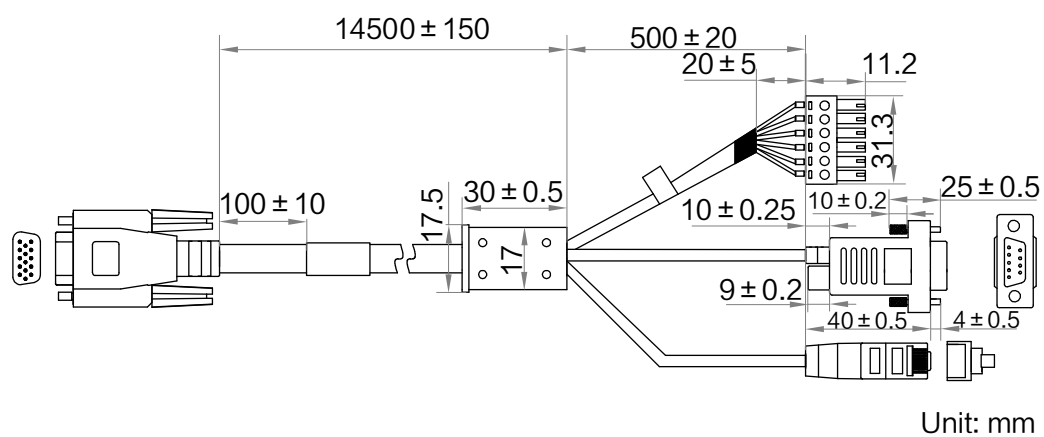

接口定义

The diagram shows a 6-pin RJ45 connector with pins numbered 1 through 6. Below the pins are six circular symbols, each containing a diagonal line from the top-left to the bottom-right, representing a specific color. Below these symbols are six small rectangular slots, each containing a small horizontal line, representing a specific color. To the right of the connector is a table mapping the pin numbers to the corresponding cable colors.

管脚	线缆颜色
1	蓝
2	灰
3	棕
4	紫
5	黑
6	红

技术参数

参数	型号	MV-IDA-PE-HDB15-RJ45DB9Open-ST-3.5/5/15m
		DB15M 接口网口组合线（标准）
物理规格		
A 端接口		DB15M
B 端接口		RJ45, DB9F, 6-Pin 端子
线束直径		7.8 mm
长度		3.5/5/15 m
线材结构		UL20276, (26AWG*2P+AB) +26AWG*8C+AB
外覆层材料		PVC
线材颜色		黑
连接器耐久力		>500 次插拔循环
最小弯曲半径		62.4 mm
适用场景		静态
电气规格		
最大工作电压		30 VDC
其他信息		
工作温度		-20℃~80℃
认证		RoHS
包装		独立包装袋

请在连接线缆前阅读对应适用设备的用户手册，了解相关注意事项。